


## Delivery Controller with pump start and valve control



**Application examples:** Extreme cold weather regions

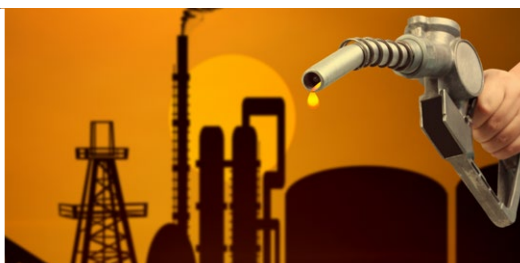

Custom deliveries at filling stations and petrol pumps



Hot and sandy deserts

The F-Series is your first and safest choice for field mount indicators in safe and hazardous area applications. Especially in harsh weather conditions like rain, snow, salty atmospheres and temperatures between  $-40^{\circ}\text{C}$  up to  $+80^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$  up to  $176^{\circ}\text{F}$ ).

### Advantages

- Robust aluminum or stainless steel 316L field enclosure (IP67 / NEMA Type4X). It is so rugged, a truck can even stand on it!
- Intrinsically Safe available - ATEX and IECEx approval for gas and dust applications.
- Programming can be done by your own crew, with the sensible menu-driven structure, saving cost and irritation. Know one, know them all!
- Very diverse mounting possibilities: walls, pipes, panels or directly onto outdoor sensors!

### Features

- Displays supplied quantity, flow rate and status.
- Control functions for pump start, valve control and flow rate monitoring including flexible response times.
- Flow rate monitoring with high and low alarm values.
- Selectable on-screen engineering units; volumetric or mass.
- Ability to process all types of signals: Sine wave (coil), NAMUR, NPN/PNP pulse, Reed-switch, Active pulse signals.
- Remote control input: Start, stop, pause or continuous signal.
- Communication option to monitor or control the process and to print the bill of loading.
- Two control outputs for pump-start and valve control.
- Full Modbus communication RS232/485/TTL.
- Power requirements: Battery powered, 8 - 30V DC, 8 - 24V AC/DC or 115 - 230V AC.
- Sensor supply 3 / 8.2 / 12 / 24V DC.

Introduction

The F133 is a unique product as it is especially designed for a controlled delivery of undefined quantities. It offers all the functionality known from gas stations to fill-up your car. The unit incorporates special functions with delay times to start a pump first, control a valve and expect a flow within a certain period of time. Moreover, the flow rate and the allowed total dispensed quantity is monitored as well. If, for whatever reason, no pulses are coming in, the delivery will be terminated after a pre-defined time. Sub-deliveries are also catered for allowing you to fill up several compartments within one and the same delivery. A wide selection of options further enhances the capabilities of this model, which includes Intrinsic Safety and full Modbus communication.

Display

The display has large 17mm (0.67") and 8mm (0.31") digits which will zero after a startcommand and display "leading eight's". During the delivery, the actual dispensed quantity is displayed together with the actual flow rate and the status of the controller. Several resettable and non-resettable totalizers are available as well as a batch counter. All values are backed-up in EEPROM memory every minute.

Configuration

All configuration settings are accessed via a simple operator menu which can be password protected. Each setting is clearly indicated with an alphanumerical description, therefore avoiding confusing abbreviations and baffling codes. All settings are safely stored in EEPROM memory in the event of sudden power failure.



Control outputs

One output is available to control a pump after receiving a start-signal. After the start-up-time, a second output will be switched to control the valve to allow the product to be dispensed. The output signals can be passive NPN, active PNP or an isolated electro-mechanical relay.

Hazardous areas

This model is ATEX and IECEx certified as Intrinsically Safe for gas applications with an allowed ambient temperature of -40°C to +70°C (-40°F to +158°F) and dust applications with an allowed ambient temperature of -40°C to +50°C (-40°F to +122°F). A flame proof Ex d enclosure with ATEX/IECEx certification is also available.

Communication

All process data and settings can be read and modified manually or through the Modbus communication link (RS232 / RS485). After the delivery, the dispensed quantity and batch number is available to be used for ticket printing (B.O.L.). The F133 has the ability to be locked-out until this information has been read and initialized.



All info at a glance



Easy to install



Easy to program



Know one know them all!




Reliable



User-friendly

## Overview application F133

The F-Series is your first and safest choice for field mount indicators in safe and hazardous area applications. Especially in harsh weather conditions like rain, snow, salty atmospheres and temperatures between -40°C up to +80°C (-40°F up to 176°F). For delivery purposes, small scale gas stations or on board of ships or trucks for customer deliveries. Suitable for filling-up multiple compartments within one delivery.

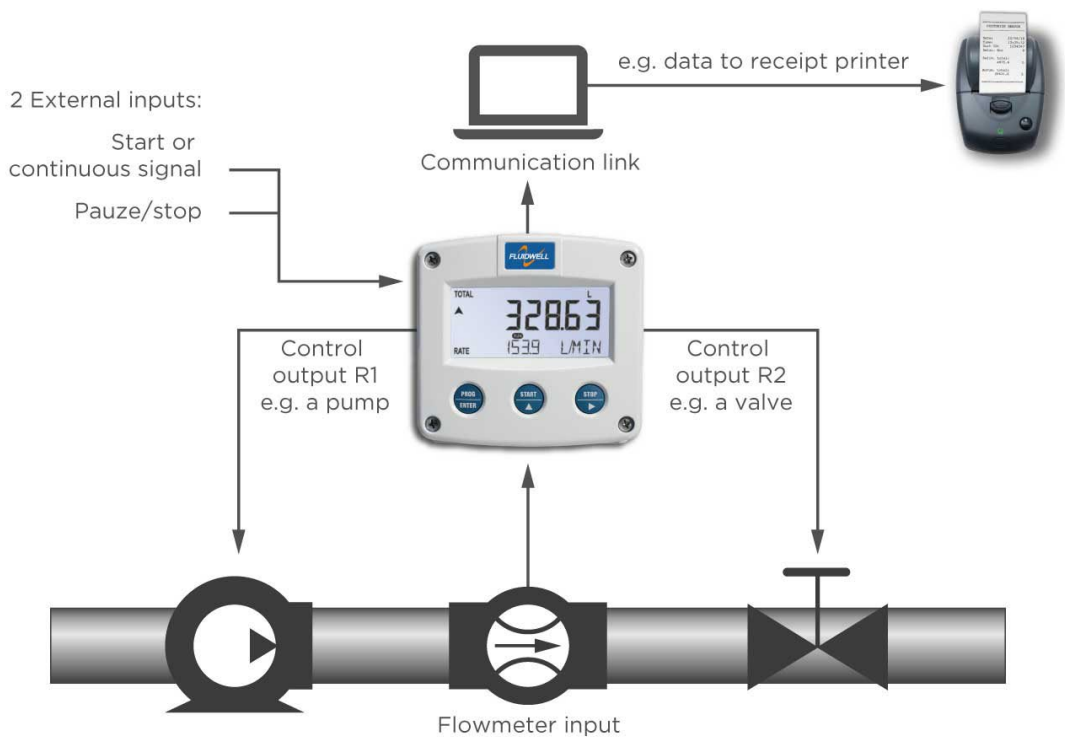


## Signal input

The F133 will accept most pulse input signals for volumetric flow or mass flow measurement. The input signal type can be selected by the user in the configuration menu without having to adjust any sensitive mechanical dip-switches or jumpers. Further, two inputs are available to control the process remotely if desired.

Type of signal	Resistance	Low Pass filter (LP)	Max. frequency	Max. frequency Low Pass filter (LP)	Min. amplitude p-p	Remark
NPN	100kΩ pull-up	100kΩ pull-up	6kHz Threshold 1.2V	1.2kHz		Open collector
REED	1MΩ pull-up	1MΩ pull-up	1.2kHz Threshold 1.2V	120Hz		
PNP	100KΩ pull-down	100KΩ pull-down	6kHz Threshold 1.2V	1.2kHz		
NAMUR	820Ω pull-down	-	4kHz	-		External power required
COIL LO	-	-		-	80mV <sub>pp</sub>	Default sensitivity
COIL-HI	-	-	-	-	20mV <sub>pp</sub>	Sensitive for interference!
COIL-HI (Type ZF)					10mV <sub>pp</sub>	
ACTIVE 8.2V DC	3K9Ω		10kHz Threshold 4V			External power required
ACTIVE 12V DC	4KΩ		10kHz Threshold 6V			External power required
ACTIVE 24V DC	3KΩ		10kHz Threshold 12V			External power required




Configuration example F133-P-CH-OT-PB-(PX)-XX-ZX

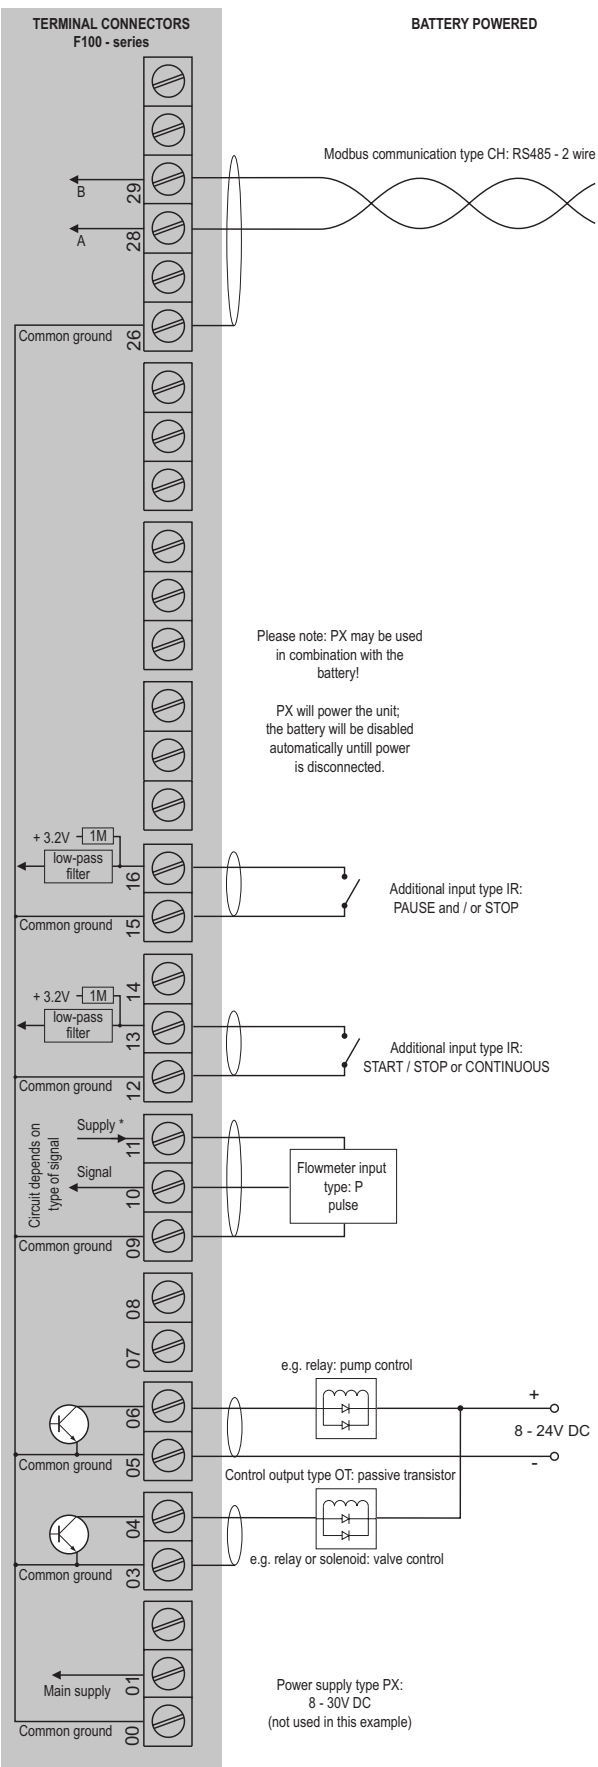

\* For pulse type inputs:  $V_{ref}$ : 1.2V/3.0V available.- NO power output, available  $I_{supply}$ : <1mA. Note: using these ref. voltages at max. load, will reduce battery life significantly.

Configuration example F133-P-CI-OR-PM-XX-ZX

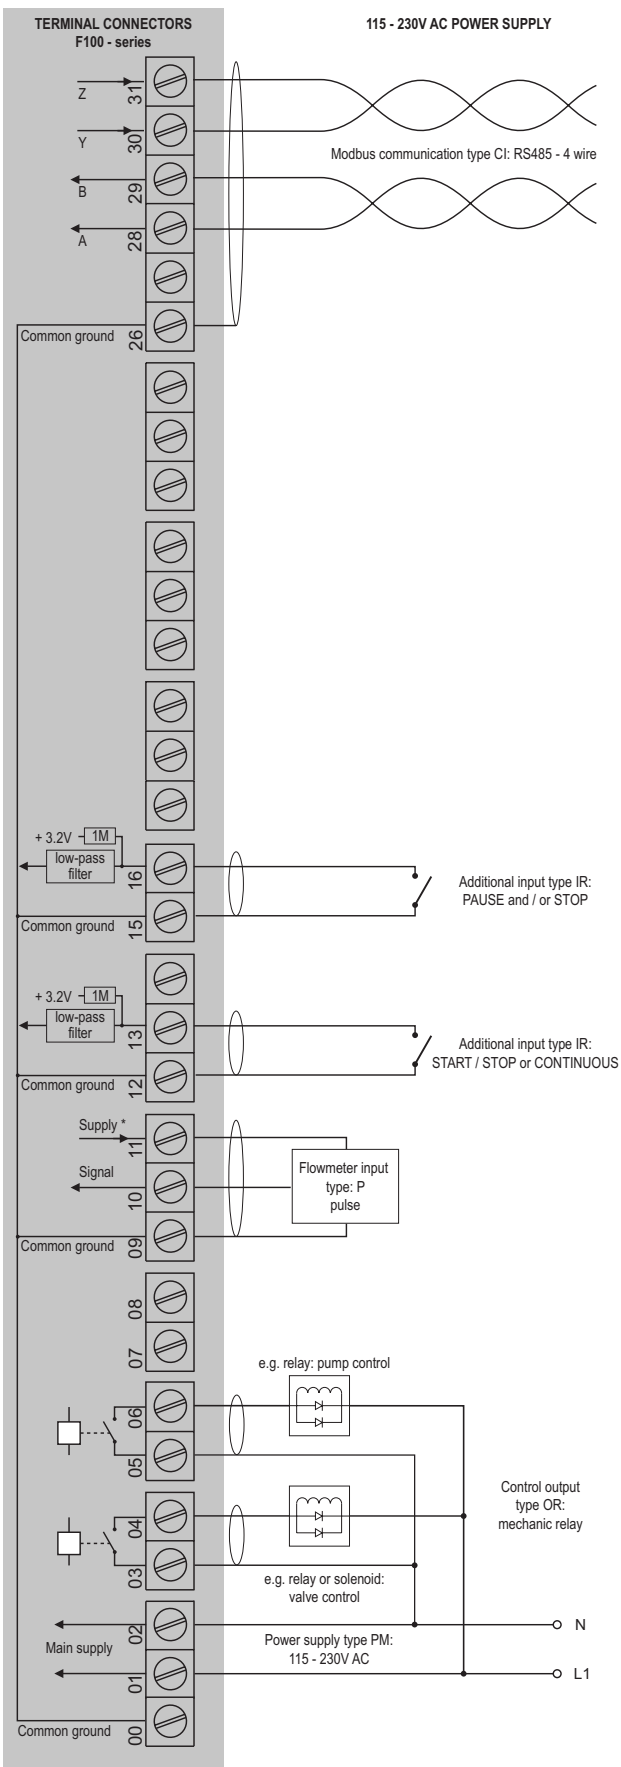

\*Supply voltage: 1.2 / 3.2 / 8.2 / 12 / 24V DC to sensor



Hazardous area applications

The F133-XI has been certified according to ATEX and IECEx by DEKRA for use in Intrinsically Safe applications with an ambient temperature of -40°C to +70°C (-40°F to +158°F). For equipment category Dust, zone 20 (1 D / EPL Da), the maximum ambient temperature is limited to 50°C (+122°F) and a maximum dust layer thickness of 200mm.

- The ATEX markings for gas and dust applications are:

Gas: **II 1 G Ex ia IIB/IIC T4 Ga.**

Dust: **II 1 D Ex ia IIIC T<sub>200</sub> 100 °C Da.**

- The IECEx markings for gas and dust applications are:

Gas: **Ex ia IIC/IIB T4 Ga.**

Dust: **Ex ia IIIC T<sub>200</sub> 100 °C Da.**


Besides the I.S. power supplies for the control outputs, it is allowed to connect up to two I.S. power supplies in IIB/IIC applications or one in IIC applications. Consult the certificate for the maximum input and output values of the circuits. Full functionality of the F133 remains available, including pump and valve control and Modbus communication (type CT). Power supply type PD-XI offers a 8.2V sensor supply e.g. for one Namur sensor. An ATEX/IECEx approved flame proof Ex d enclosure is available as well. Please contact your supplier for further details.

Certificate of conformity KEMA 03ATEX1074 X

- IECEx DEK 11.0042X




Configuration example IIB / IIIC and IIC - F133-P-(CT)-OT-PC-(PX)-XI - Battery powered unit

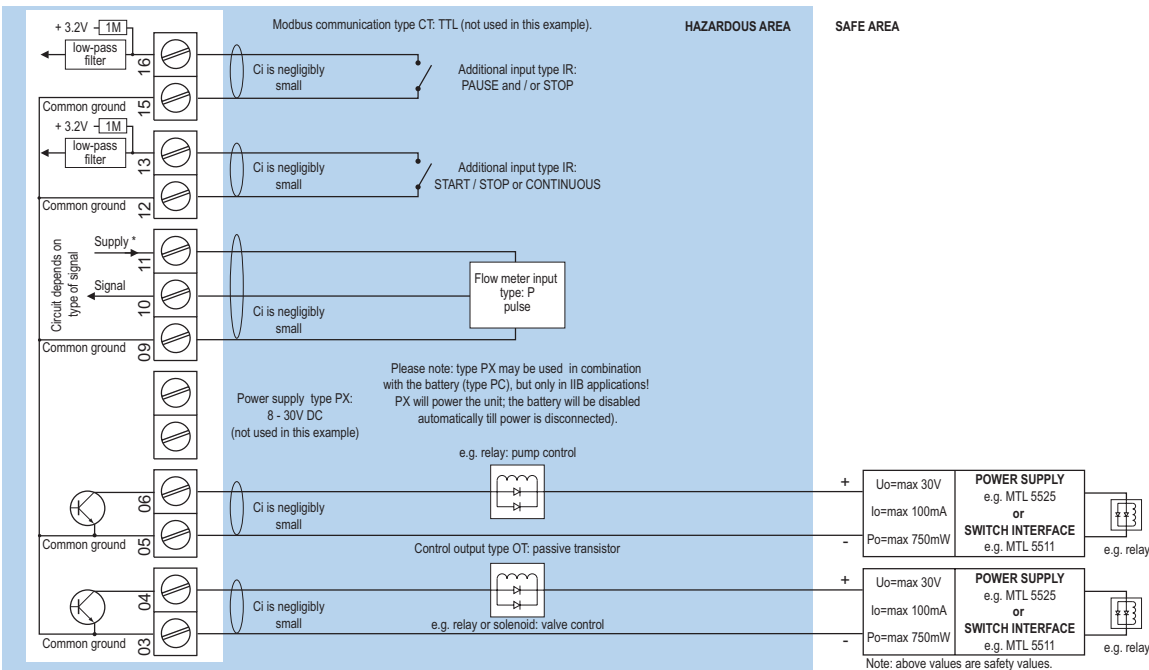


\* For pulse type inputs: V<sub>in</sub>: 1.2V/3.0V available. - NO power output, available I<sub>supply</sub>: <1mA.  
Note: using these ref. voltages at max. load, will reduce battery life significantly.

Configuration example IIB / IIIC and IIC - F133-P-(CT)-OT-PX-XI - Basic power requirement 8 - 30V DC

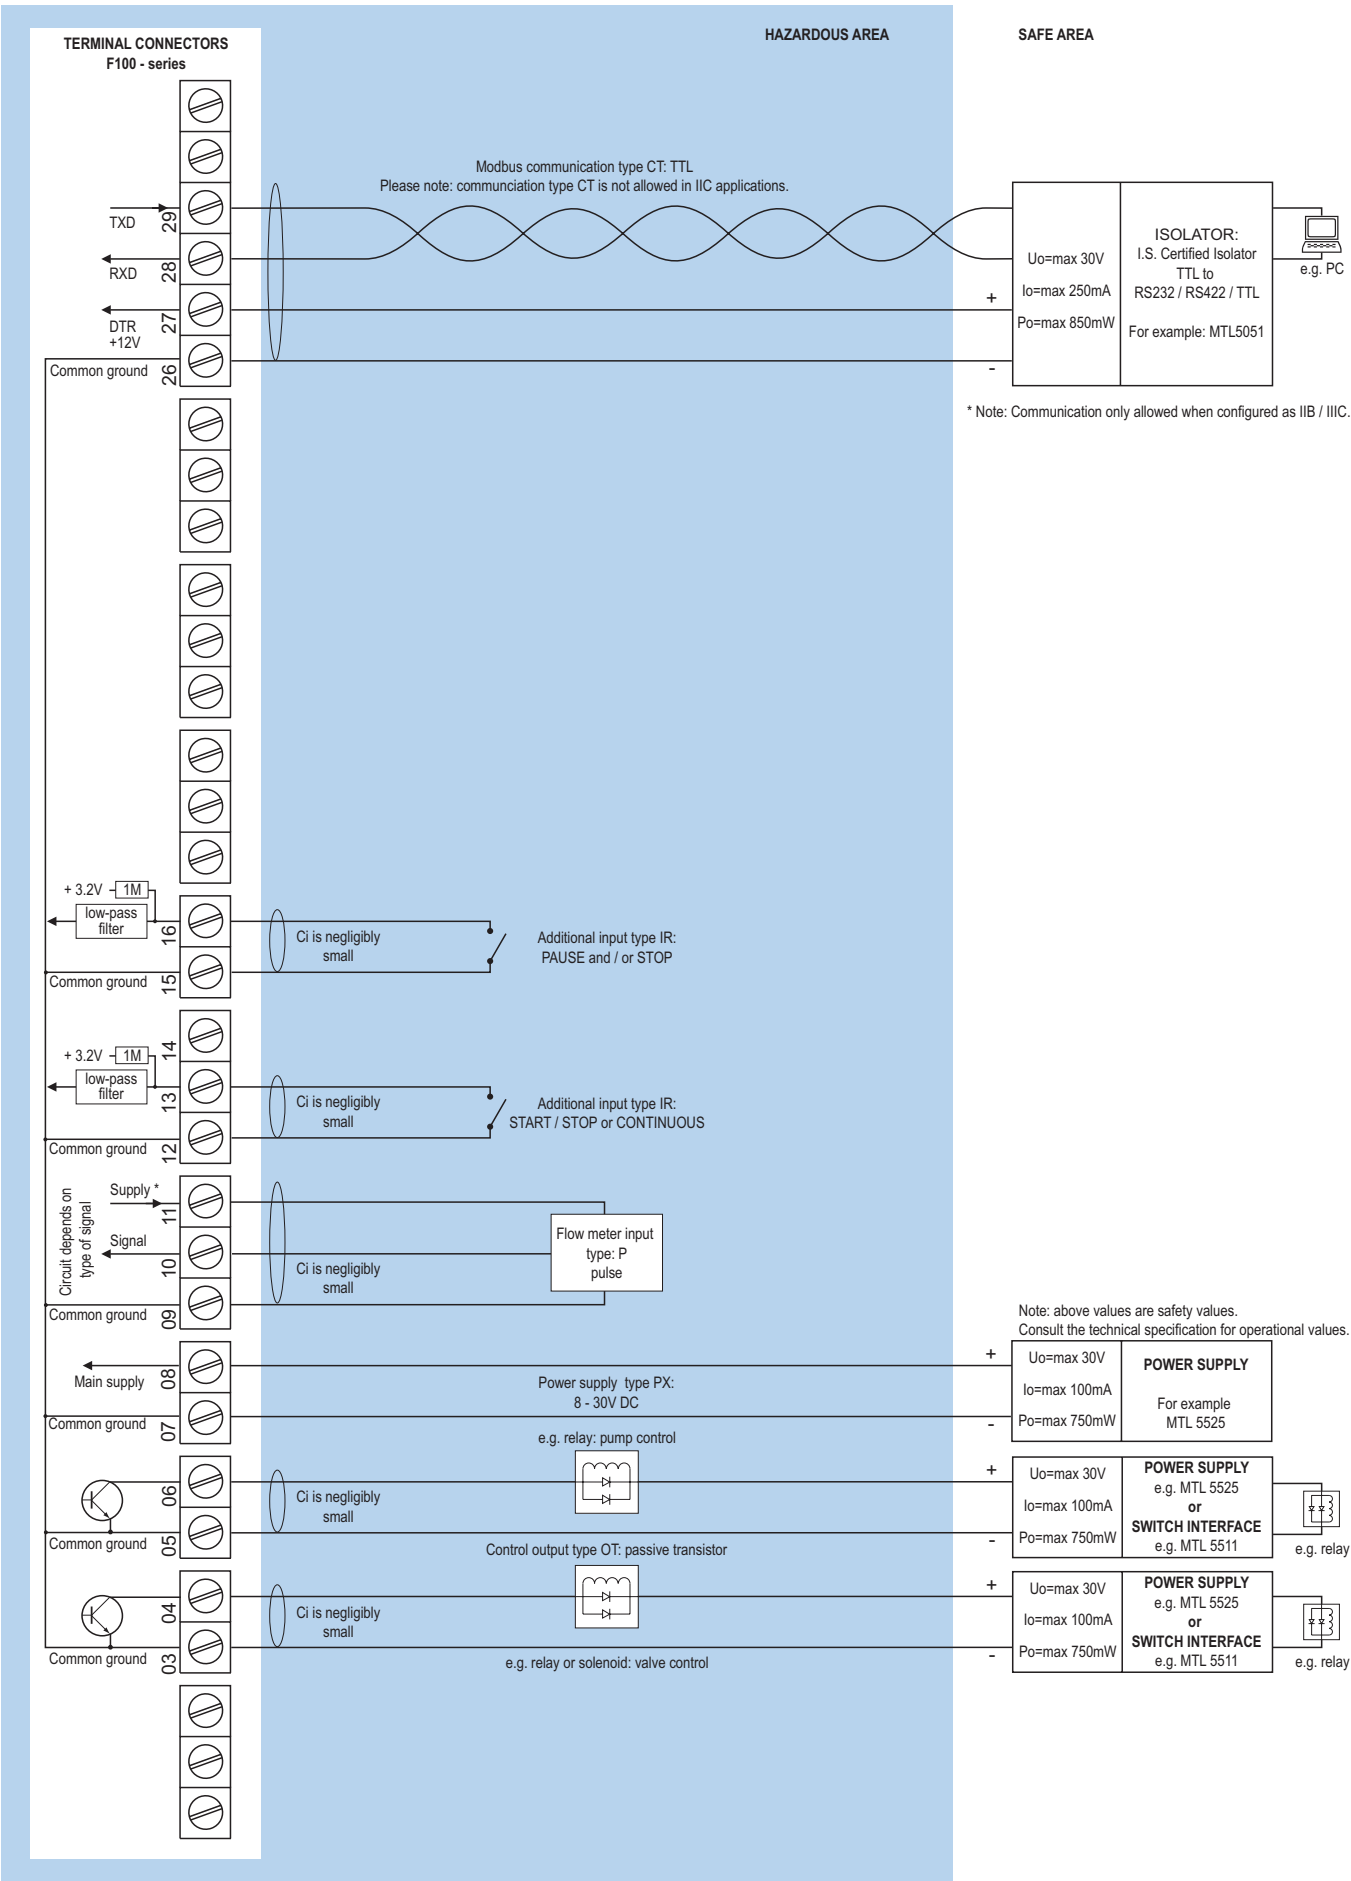

\* For pulse type inputs:  $V_{ref}$ : 1.2V/3.0V available.- NO power output, available  $I_{supply}$ : <1mA.  
Note: using these ref. voltages at max. load, will reduce battery life significantly.


Configuration example IIB / IIIC and IIC - F133-P-(CT)-OT-PD-XI - Power requirement 16 - 30V DC

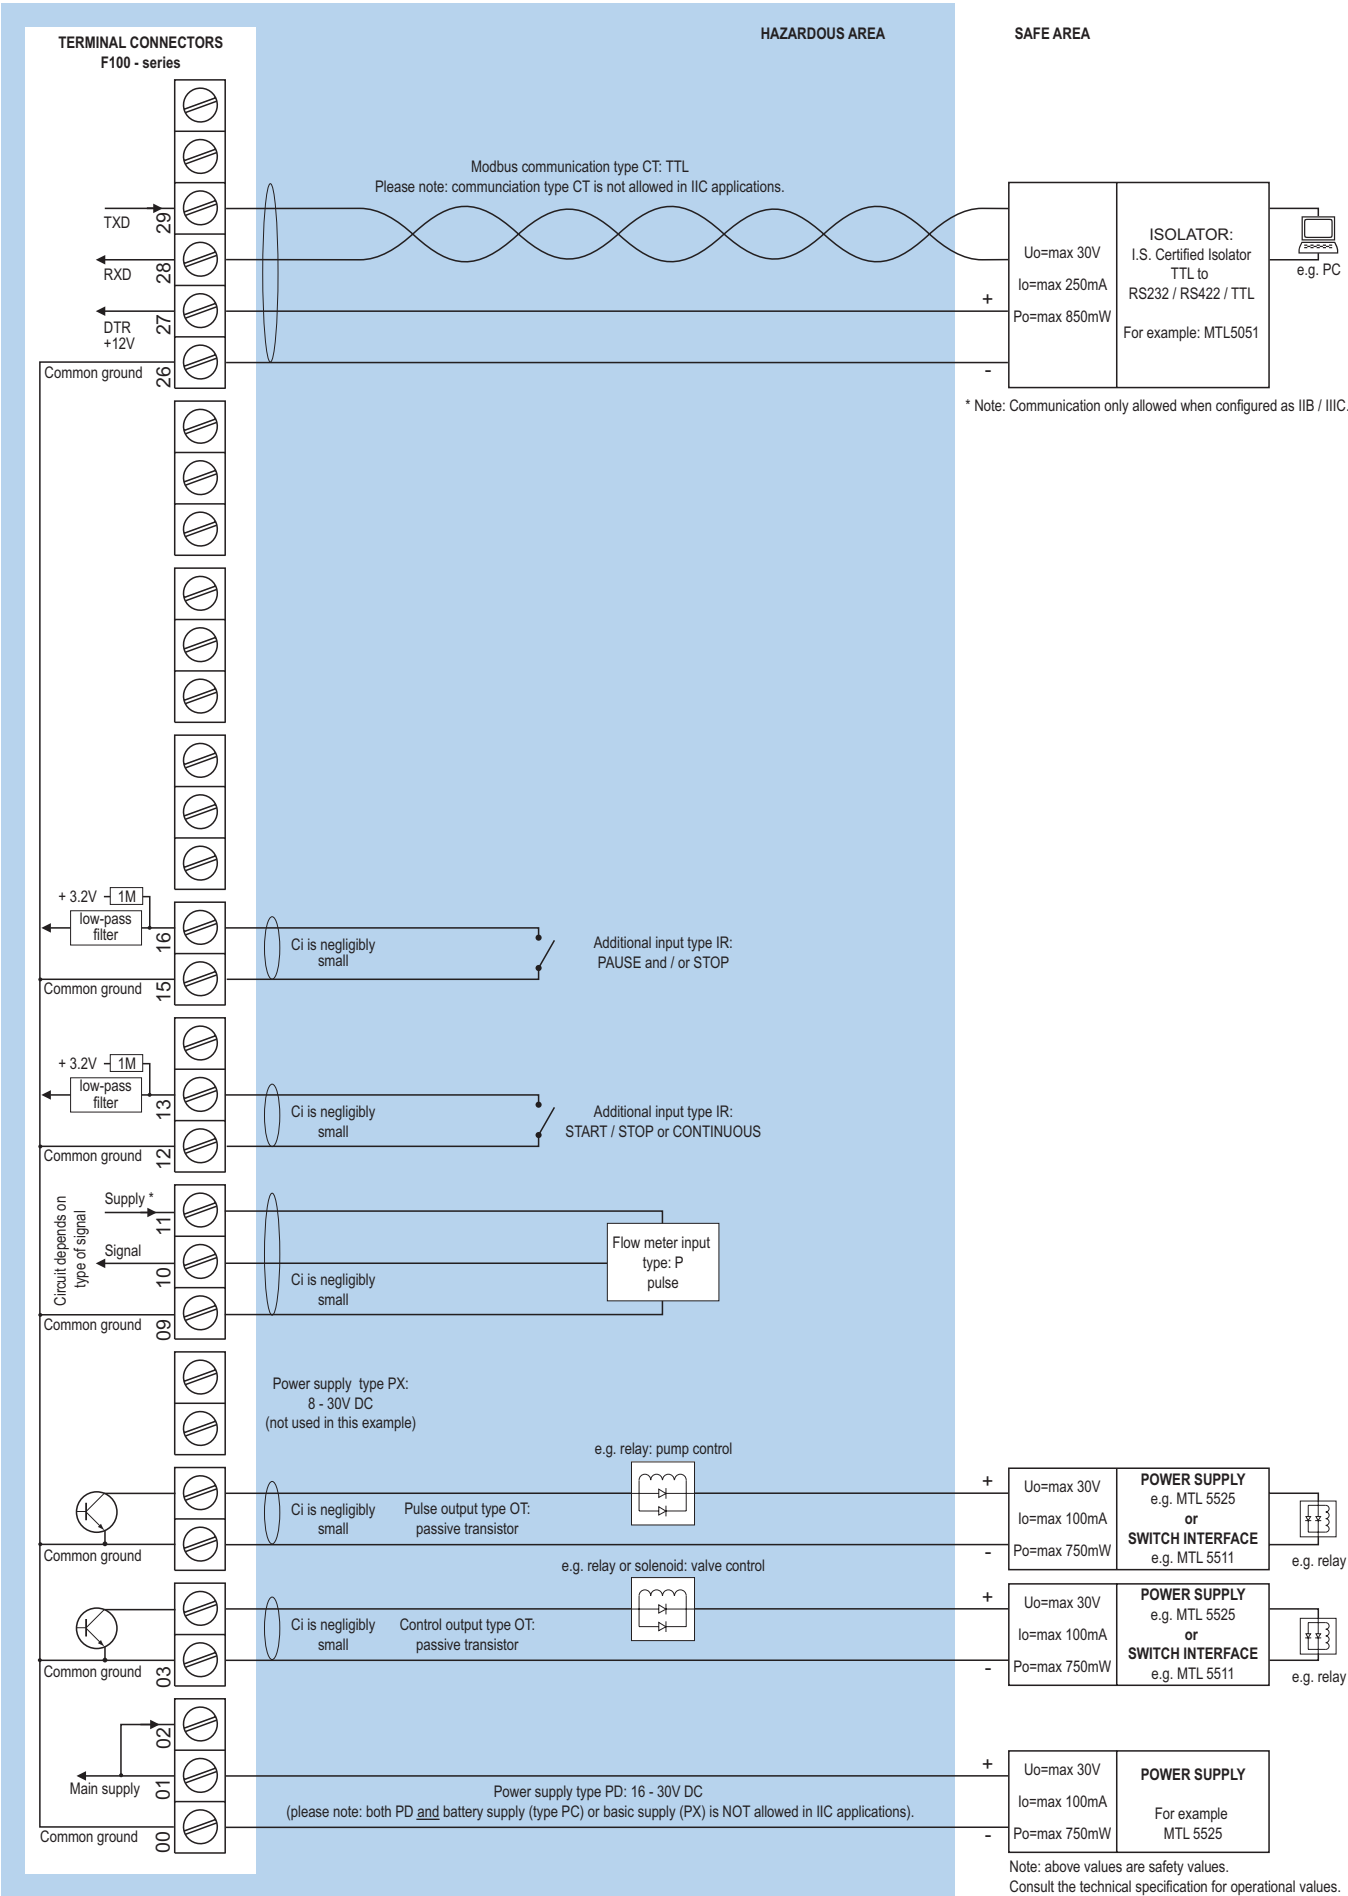

\* Note power supply type PD: the supply voltage to pulse sensors is maximum 8.7V (Uo=max 8.7V Io=max 25mA Po=max 150mW) and to analog sensors as connected to terminal 1 (internally linked).



Configuration example IIB / IIIC - F133-P-CT-OT-PX-XI - Basic power requirement 8 - 30V DC

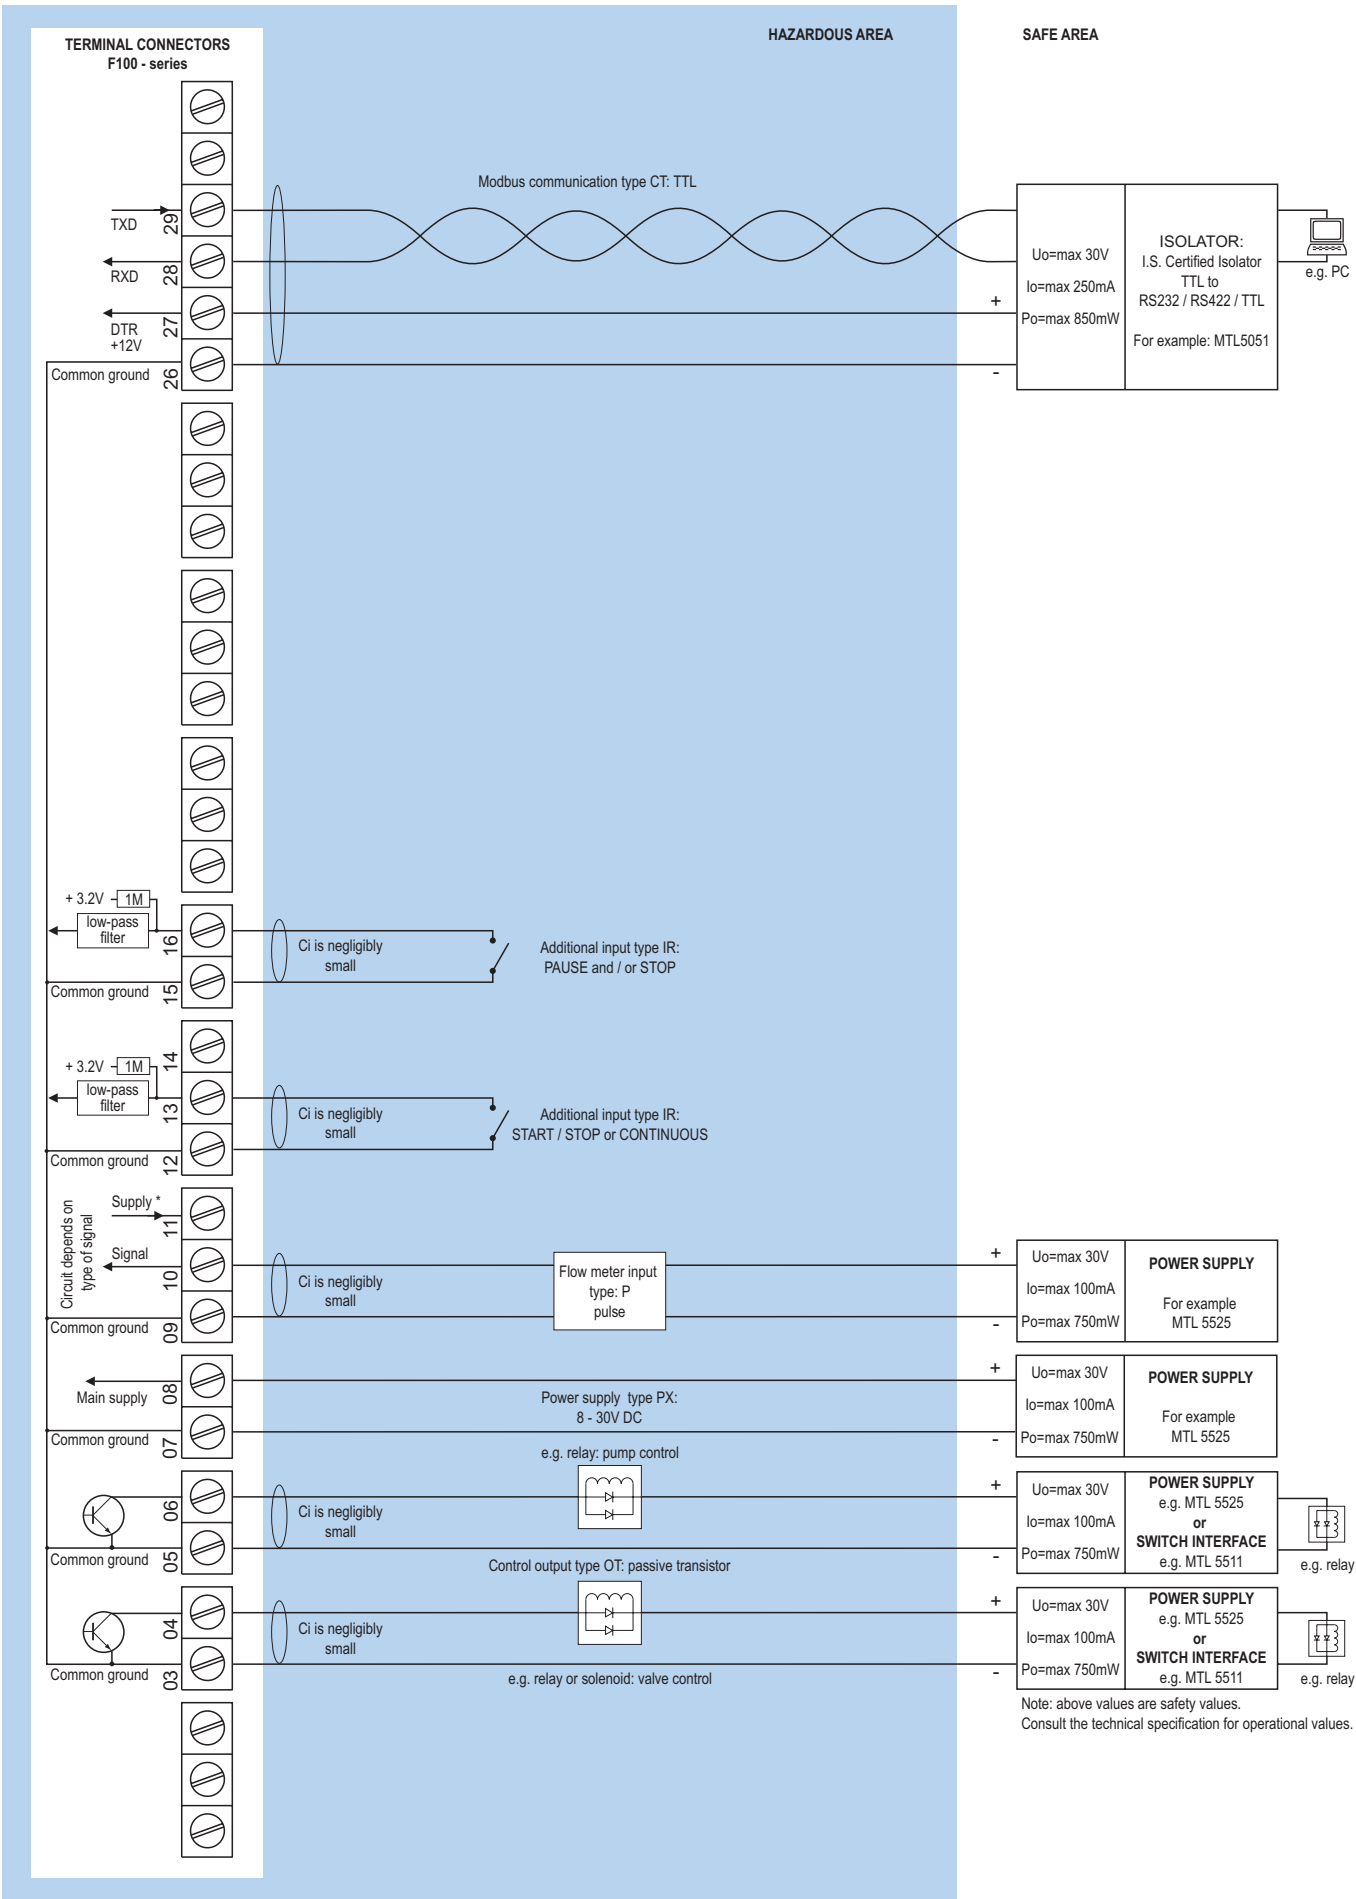

\* For pulse type inputs:  $V_{ref} : 1.2V/3.0V$  available.- NO power output, available  $I_{supply} : <1mA$ .  
Note: using these ref. voltages at max. load, will reduce battery life significantly.

## Display

<b>Type</b>	High intensity reflective numeric and alphanumeric LCD, UV-resistant.
<b>Dimensions</b>	90 x 40mm (3.5" x 1.6").
<b>Digits</b>	Seven 17mm (0.67") and eleven 8mm (0.31") digits. Various symbols and measuring units.
<b>Refresh rate</b>	User definable: fast, 1sec, 3sec, 15sec, 30sec, off.
<b>Option ZB</b>	Transflective LCD with white LED-backlight. Intensity can be adjusted in the configuration menu. Good readings in full sunlight and darkness.
<b>Note ZB</b>	Only available for safe area applications.

## Ambient temperature

<b>Safe areas</b>	-40°C to +80°C (-40°F to +176°F).
<b>Intrinsically Safe</b>	-40°C to +70°C (-40°F to +158°F).
<b>Dust, zone 20</b>	-40°C to +50°C (-40°F to +122°F).

## Data protection

<b>Type</b>	EEPROM backup of all settings. Backup of running totals every minute. Data retention at least 10 years.
<b>Password</b>	Configuration settings can be password protected.

## Directives & Standards

<b>EMC</b>	Directive 2014/30/EU, FCC 47 CFR part 15.
<b>Low voltage</b>	Directive 2014/35/EU
<b>RoHS</b>	Directive 2011/65/EU
<b>ATEX / IECEx</b>	Directive 2014/34/EU, IEC 600079-0, IEC 60079-11.
<b>IP &amp; NEMA</b>	EN 60529 & NEMA 250

## Intrinsically Safe (Type XI)

<b>ATEX</b>	Gas: II 1 G Ex ia IIB/IIC T4 Ga. Dust: II 1 D Ex ia IIIC T <sub>200</sub> 100 °C Da.
<b>IECEx</b>	Gas: Ex ia IIC/IIB T4 Ga. Dust: Ex ia IIIC T <sub>200</sub> 100 °C Da.
<b>Ambient Ta</b>	-40°C to +70°C (-40°F to +158°F).
<b>Dust, zone 20</b>	-40°C to +50°C (-40°F to +122°F).

## Explosion proof (Type XF)

<b>ATEX/IECEx</b>	Gas: II 2 G Ex db IIB+H2 T5 Gb. Dust: II 2 D Ex tb IIIC T80°C.
<b>Protection</b>	IP66
<b>Type XF</b>	Dimensions of enclosure: 300 x 250 x 200mm (11.8" x 9.9" x 7.9") L x H x D.
<b>Weight</b>	Appr. 15kg.

## Enclosure

<b>Window</b>	Polycarbonate window.
<b>Sealing</b>	Silicone.
<b>Control keys</b>	Three industrial micro-switch keys. UV-resistant silicone keypad.

## Panel mount enclosures

<b>Dimensions</b>	130 x 120 x 60mm (5.12" x 4.72" x 2.36") - W x H x D.
<b>Panel cut-out</b>	115 x 98mm (4.53" x 3.86") L x H.
<b>Type HB</b>	Die-cast aluminum panel mount enclosure IP65 / NEMA Type4X.
<b>Weight</b>	600 gr.
<b>Type HC</b>	GRP panel mount enclosure IP65 / NEMA Type4X, UV-resistant and flame retardant.
<b>Weight</b>	450 gr.
<b>Type HSB</b>	Die-cast stainless steel 316L IP67 / NEMA Type4X.
<b>Weight</b>	1150gr.

## GRP wall / field mount enclosures

<b>General</b>	GRP wall/field mount enclosure IP67 / NEMA Type4X, UV-resistant and flame retardant.
<b>Dimensions</b>	130 x 120 x 75mm (5.12" x 4.72" x 2.95") - W x H x D.
<b>Weight</b>	600 gr.
<b>Type HD</b>	Cable entry: no holes.
<b>Type HE</b>	Cable entry: 2 x Ø 16mm and 1 x Ø 20mm.
<b>Type HF</b>	Cable entry: 1 x Ø 22mm (7/8").
<b>Type HG</b>	Cable entry: 2 x Ø 20mm.
<b>Type HH</b>	Cable entry: 6 x Ø 12mm.
<b>Type HJ</b>	Cable entry: 3 x Ø 22mm (7/8").
<b>Type HK</b>	Flat bottom, cable entry: no holes.

## Aluminum wall / field mount enclosures

<b>General</b>	Die-cast aluminum wall/field mount enclosure IP67 / NEMA Type4X with 2-component UV-resistant coating. Extended back cover available with undrilled preparation for direct meter mounting.
<b>Dimensions</b>	130 x 120 x 75mm (5.12" x 4.72" x 2.95") - W x H x D. 130 x 120 x 90mm (5.12" x 4.72" x 3.54") - W x H x D.
<b>Weight</b>	1100 gr. / extended enclosure: 1310 gr.
<b>Type HA</b>	Cable entry: 2 x PG9 and 1 x M20.
<b>Type HL</b>	Cable entry: 2 x 1/2" NPT.
<b>Type HM/HBM</b>	Cable entry: 2 x M16 and 1 x M20.
<b>Type HN</b>	Cable entry: 1 x M20.
<b>Type HO/HBO</b>	Cable entry: 2 x M20.
<b>Type HP</b>	Cable entry: 6 x M12.
<b>Type HT</b>	Cable entry: 1 x 1/2" NPT.
<b>Type HU/HBU</b>	Cable entry: 3 x 1/2" NPT.
<b>Type HV</b>	Cable entry: 4 x M20.
<b>Type HZ</b>	Cable entry: no holes.

## Stainless steel 316L wall / field mount enclosures

<b>General</b>	Die-cast stainless steel 316L wall / field mount enclosure with flat bottom. IP67 / NEMA Type4X.
<b>Dimensions</b>	130 x 120 x 75mm (5.12" x 4.72" x 2.95") - W x H x D.
<b>Weight</b>	2700 gr.
<b>Type HSM</b>	Cable entry: 2 x M16 + 1 x M20.
<b>Type HSO</b>	Cable entry: 2 x M20.
<b>Type HSU</b>	Cable entry: 3 x 1/2"NPT.

## Signal inputs - Flowmeter

<b>Type P</b>	Coil / sine wave (HI: 20mVpp or LO: 80mVpp - sensitivity selectable), NPN/PNP, open collector, reed switch, Namur, active pulse signals 8 - 12 and 24V DC.
<b>Frequency</b>	Minimum 0Hz - maximum 6kHz for total and flow rate. Maximum frequency depends on signal type and internal low-pass filter. E.g. reed switch with low-pass filter: max. frequency 120Hz.
<b>K-Factor</b>	0.000010 - 9,999,999 with variable decimal position.
<b>Low-pass filter</b>	Available for all pulse signals.
<b>Option ZF</b>	coil sensitivity 10mVpp.

## Additional inputs

<b>Function</b>	Remote control: Two terminal inputs to start, pause and stop or continuous signal.
<b>Type IR</b>	Internally pulled-up switch contact - NPN.
<b>Duration</b>	Minimum pulse duration 300msec.

## Signal outputs - Digital output

<b>Function</b>	To control a pump and a valve.
<b>Frequency</b>	Max. 500Hz. Pulse width user definable between 0.001 second up to 9.999 seconds.
<b>Type OA</b>	Two active 24V DC transistor outputs (PNP); max. 50mA per output (requires -PD, PF, PM or PX). Requires min. 24V power supply
<b>Type OR</b>	Two electro-mechanical relay outputs isolated max. switch power 230V AC (N.O.) - 0.5A per relay (requires PF or PM).
<b>Type OT</b>	Two passive transistor outputs (NPN) - not isolated. Max. 50V DC - 300mA per output.

## Signal outputs - Communication option

<b>Function</b>	Reading display information, reading / writing all configuration settings + lockout function.
<b>Protocol</b>	Modbus RTU.
<b>Speed</b>	1200 - 2400 - 4800 - 9600 baud.
<b>Addressing</b>	Maximum 255 addresses.
<b>Type CB</b>	RS232
<b>Type CH</b>	RS485 2-wire
<b>Type CI</b>	RS485 4-wire
<b>Type CT</b>	TTL Intrinsically Safe.

## Mounting accessories

<b>ACF02</b>	Stainless steel wall mounting kit.
<b>ACF05</b>	Stainless steel pipe mounting kit (worm gear clamps not included).
<b>ACF06</b>	Two stainless steel worm gear clamps Ø 44 - 56mm.
<b>ACF07</b>	Two stainless steel worm gear clamps Ø 58 - 75mm.
<b>ACF08</b>	Two stainless steel worm gear clamps Ø 77 - 95mm.
<b>ACF09</b>	Two stainless steel worm gear clamps Ø 106 - 138mm.
<b>ACF11</b>	Swivel with 25° movement from center axis for direct flowmeter mounting: 1" NPT to 1/2" NPT.

## Cable glands

<b>ACF20</b>	For HA enclosure, includes O-rings.
<b>ACF25</b>	For HE enclosure, includes locknuts and O-rings.
<b>ACF26</b>	For HF enclosure, includes locknuts and O-rings.
<b>ACF27</b>	For HG enclosure, includes locknuts and O-rings.
<b>ACF28</b>	For HH enclosure, includes locknuts and O-rings.
<b>ACF29</b>	For HJ enclosure, includes locknuts and O-rings.
<b>ACF32</b>	For HM enclosure, includes O-rings.
<b>ACF33</b>	For HN enclosure, includes O-rings.
<b>ACF34</b>	For HO enclosure, includes O-rings.
<b>ACF35</b>	For HP enclosure, includes O-rings.
<b>ACF39</b>	For HT enclosure, includes O-rings.
<b>ACF40</b>	For HU enclosure, includes O-rings.

## Blind plugs

<b>ACF50</b>	For HA enclosure, includes O-rings.
<b>ACF55</b>	For HE enclosure, includes locknuts and O-rings.
<b>ACF56</b>	For HF enclosure, includes locknuts and O-rings.
<b>ACF57</b>	For HG enclosure, includes locknuts and O-rings.
<b>ACF58</b>	For HH enclosure, includes locknuts and O-rings.
<b>ACF59</b>	For HJ enclosure, includes locknuts and O-rings.
<b>ACF62</b>	For HM enclosure, includes O-rings.
<b>ACF63</b>	For HN enclosure, includes O-rings.
<b>ACF64</b>	For HO enclosure, includes O-rings.
<b>ACF65</b>	For HP enclosure, includes O-rings.
<b>ACF69</b>	For HT enclosure, includes O-rings.
<b>ACF70</b>	For HU enclosure, includes O-rings.

## Intrinsically Safe isolators

<b>ACG01</b>	MTL5511 - One channel pulse or switch output transfer from hazardous area to safe area.
<b>ACG02</b>	MTL5525 - One channel power supply from safe area to hazardous area (e.g. to power the unit with PD or to power a switching or analog device in hazardous area).
<b>ACG03</b>	MTL5541 - One channel 4 - 20mA repeater from hazardous area to safe area.
<b>ACG04</b>	MTL 5051 - Bi-direction serial-data-isolator (for Modbus communication).
<b>ACG05</b>	MTL5516C - Two channel pulse or switch output transfer from hazardous area to safe area.
<b>ACG06</b>	MTL5513 - One channel pulse or switch output transfer from hazardous area to safe area.
<b>ACG07</b>	MTL5546Y - One channel isolated driver bringing 4 - 20mA from safe area to hazardous area, HART transparent, OCD.

## Power requirements

<b>Type PB</b>	Long life Lithium battery - life-time depends upon settings and configuration - up to 5 years. (requires PD or PX)
<b>Type PC</b>	Intrinsically Safe long life lithium battery life-time depends upon settings and configuration - up to 5 years. (requires XI and PD or PX)
<b>Type PD</b>	8 - 24V AC / DC $\pm$ 10%. Power consumption max. 5W.
<b>Type PD-XI</b>	16 - 30V DC power consumption max. 1W.
<b>Type PF</b>	24V AC / DC $\pm$ 10%. Power consumption max. 15W.
<b>Type PM</b>	115 - 230V AC $\pm$ 10%. Power consumption max. 15W.
<b>Type PX</b>	8 - 30V DC. Power consumption max. 0.75W.
<b>Type ZB</b>	12 - 30V DC $\pm$ 10%. Power consumption max. 1.5W.
<b>Note PB/PF/PM</b>	Not available Intrinsically Safe.
<b>Note PF/PM</b>	The total consumption of the sensors and outputs may not exceed 400mA @ 24V.
<b>Note XI</b>	For Intrinsically Safe applications, consult the safety values in the certificate.

## Sensor excitation

<b>Type PB/PC/PX</b>	3V DC for pulse signals and 1.2V DC for coil pick-up.
<b>Note PB/PC/PX</b>	This is not a real sensor supply. Only suitable for sensors with a very low power consumption like coils (sine wave) and reed-switches.
<b>Type PD</b>	1.2 / 3 / 8.2 / 12 / 24V DC - max. 50mA @ 24V DC. $U_{max}$ sensor is 2V below $U_{supply}$
<b>Type PD-XI</b>	1.2 / 3 / 8.2V DC - max. 7mA @ 8.2V DC and mains power supply voltage (as connected to terminal 1).
<b>Type PF / PM</b>	1.2 / 3 / 8.2 / 12 / 24V DC - max. 400mA @ 24V DC.

## Terminal connections

<b>Type</b>	Removable plug-in terminal strip. Wire max. 1.5mm <sup>2</sup> and 2.5mm <sup>2</sup> .
-------------	---

## Operator functions

<b>Displayed info</b>	<ul style="list-style-type: none"> <li>• Leading eight's before zeroing.</li> <li>• Supplied quantity.</li> <li>• Flow rate.</li> <li>• Non-resettable accumulated supplied quantity.</li> <li>• Resettable total measured quantity.</li> <li>• Non-resettable accumulated total measured quantity.</li> <li>• Non-resettable batch counter.</li> <li>• High flow rate monitoring</li> <li>• Low flow rate monitoring</li> <li>• Resettable supplied quantity (automatically after new start-command).</li> </ul>
-----------------------	---

## Total

<b>Digits</b>	7 digits.
<b>Units</b>	L, m <sup>3</sup> , GAL, USGAL, kg, lb, bbl, no unit.
<b>Decimals</b>	0 - 1 - 2 or 3.
<b>Note</b>	Total can be reset to zero.

## Accumulated total

<b>Digits</b>	11 digits.
<b>Units / decimals</b>	According to selection for total.
<b>Note</b>	Can not be reset to zero.

## Flow rate

<b>Digits</b>	7 digits.
<b>Units</b>	mL, L, m <sup>3</sup> , Gallons, kg, Ton, lb, bl, cf, RND, ft <sup>3</sup> , scf, Nm <sup>3</sup> , NI, igal - no units.
<b>Decimals</b>	0 - 1 - 2 or 3.
<b>Time units</b>	/sec - /min - /hr - /day.

## Alarm values

<b>Digits</b>	7 digits.
<b>Units</b>	According to selection for flow rate.
<b>Decimals</b>	According to selection for flow rate.
<b>Time units</b>	According to selection for flow rate.
<b>Type of alarm</b>	Low, high flow rate alarm. Includes alarm delay time.

## Batch counter

<b>Function</b>	Value will increment after every finished delivery.
<b>Digits</b>	7.
<b>Note</b>	Non-resettable.

	Description	
Model	<b>F133</b>	<b>Delivery controller with pump start and valve control.</b>
Input	<b>P</b>	<b>Pulse input, e.g., coil, npn, pnp, namur, reed-switch.</b>
Communication	CB	Communication RS 232 - Modbus RTU - requires XX.
	CH	Communication RS 485 - 2wire - Modbus RTU - requires XX.
	CI	Communication RS 485 - 4wire - Modbus RTU - requires XX.
	CT	Intrinsically Safe TTL - Modbus RTU - requires XI.
	<b>CX</b>	<b>No communication.</b>
Enclosures	HB	Aluminum panel mount enclosure.
	<b>HC</b>	<b>GRP panel mount enclosure.</b>
	HSB	Stainless steel 316L panel mount enclosure.
	HD	GRP field mount - Cable entry: no holes.
	HE	GRP field mount - Cable entry: 2 x Ø 16mm & 1 x Ø 20mm.
	HF	GRP field mount - Cable entry: 1 x Ø 22mm ( $\frac{7}{8}$ ").
	HG	GRP field mount - Cable entry: 2 x Ø 20mm.
	HH	GRP field mount - Cable entry: 6 x Ø 12mm.
	HJ	GRP field mount - Cable entry: 3 x Ø 22mm ( $\frac{7}{8}$ ").
	HK	GRP field mount - Flat bottom, cable entry: no holes.
	HA	Aluminum field mount - Cable entry: 2 x PG9 + 1 x M20.
	HL	Aluminum field mount - Cable entry: 2 x 1/2"NPT.
	HM	Aluminum field mount - Cable entry: 2 x M16 + 1 x M20.
	HN	Aluminum field mount - Cable entry: 1 x M20.
	HO	Aluminum field mount - Cable entry: 2 x M20.
	HP	Aluminum field mount - Cable entry: 6 x M12.
	HT	Aluminum field mount - Cable entry: 1 x 1/2"NPT.
	HU	Aluminum field mount - Cable entry: 3 x 1/2"NPT.
	HV	Aluminum field mount - Cable entry: 4 x M20.
	HZ	Aluminum field mount - Cable entry: no holes.
	HBM	Extended Alu. field/meter mount - Cable entry: 2 x M16 + 1 x M20.
	HBO	Extended Alu. field/meter mount - Cable entry: 2 x M20.
	HBU	Extended Alu. field/meter mount - Cable entry: 3 x 1/2"NPT.
	HSM	Stainless steel 316L field mount - Cable entry: 2 x M16 + 1 x M20.
	HSO	Stainless steel 316L field mount - Cable entry: 2 x M20.
	HSU	Stainless steel 316L field mount - Cable entry: 3 x 1/2"NPT.
Additional	<b>IR</b>	<b>Remote control input to start, pause, stop or continuous signal.</b>
Digital output	OA	Two active transistor outputs- requires XX and PD, PF, PM or PX.
	OR	Two mechanical relay outputs - requires XX and PF or PM.
	<b>OT</b>	<b>Two passive transistor outputs.</b>
Power	PD	8 - 24V AC/DC + sensor supply - with XI: 16 - 30V DC.
	PF	24V AC/DC + sensor supply - requires XX.
	PM	115 - 230V AC + sensor supply - requires XX.
	<b>PX</b>	<b>Basic power supply 8 - 30V DC.</b>
Battery	PB	Additional lithium battery powered (optional) - requires XX and PD or PX.
	PC	Additional lithium battery powered (optional) - Intrinsically safe - requires XI, and PD or PX.
Hazardous	XI	Intrinsically safe, according ATEX and IECEx.
	XF	Ex d enclosure - 3 keys according ATEX and IECEx.
	<b>XX</b>	<b>Safe area only.</b>
Options	ZB	Backlight - requires XX.
	ZF	Coil input 10mVpp.
	<b>ZX</b>	<b>No options.</b>

The **bold** marked text contains the standard configuration: F133-P-CX-HC-IR-OT-PX-XX-ZX.