

A1 commercial grade LCD turbine flowmeters

A1 commercial grade meters are low cost turbines in aluminium and nylon for fuel and water applications. Flow rates up to 1135L/min. LCD readout with flow rate, accumulated total and batch totals and permanent field calibration feature make these meters excellent value. Accuracy is ±1.5%.




A1 series Aluminium



A1 series Nylon

- Economically priced
- Aluminium and Nylon designs
- Battery powered
- Display of flow rate & 2x totalizers

Dimensional Information

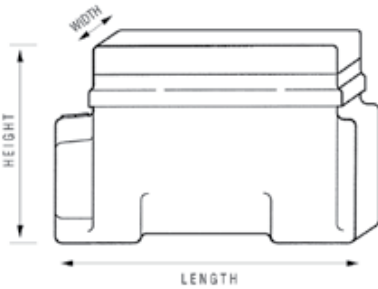

| Model | Flow rate l/min | Pressure bar | Length mm | Height mm | Width mm |
|-------|-----------------|--------------|-----------|-----------|----------|
| A025 | 11 | 21 | 102 | 63 | 51 |
| A100 | 11 - 190 | 21 | 102 | 63 | 51 |
| A200 | 114 - 1135 | 21 | 152 | 114 | 76 |
| N025 | 11 | 10.2 | 102 | 63 | 51 |
| N100 | 11 - 190 | 10.2 | 102 | 63 | 51 |

Dimensions are for reference only and may vary by model.

Options & Ordering Information

